



"Isabella"
Interior Door Panels

Bremen, 28.10.1959

From vehicle Nos. "Isabella" 1 164 237
"TS" 1 164 229
"Combi" 315 467

onwards, the method of fixing the interior door panels is altered. In place of the chromium-plated countersunk self-tapping screws, the panel is now secured by four spring clips. Your attention is drawn to the following instructions for dismantling and assembly:

Interior Door Panels, Removal

1. Undo screws and remove decorative strip.
2. Remove door "pull".
3. Remove window winding handle by pressing back the rosette so that the retaining pin may be removed.
4. Remove quarter-light window control handle.
5. Lift interior door panel from the top and by the armrest (Fig.1).
6. Lift off interior door panel as shown in adjacent diagram, working it alternately upwards and backwards and forward as may be necessary until it comes free (Fig.2).

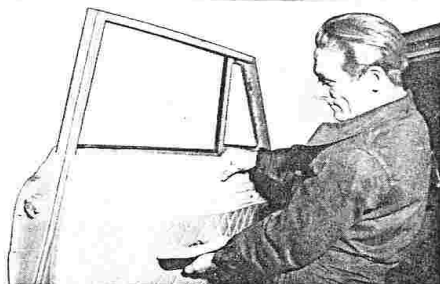


Fig. 1



Fig. 2

Interior Door Panels, Fitting

1. Offer up the interior door panel so that the lower spring clips hang forward (Fig.3).
2. Insert the spring clips into position in the order shown in the illustration. (see Fig.3).

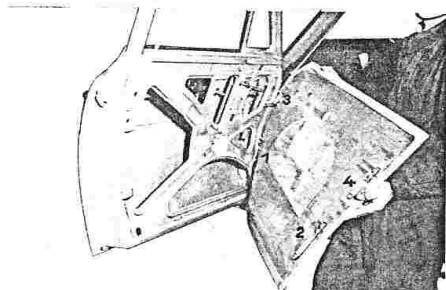


Fig. 3

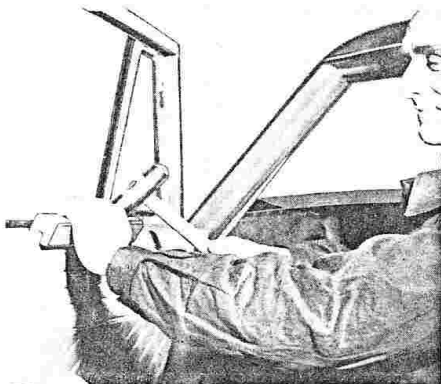


Fig.4

3. Tap the panel home with mallet and suitable piece of hardwood (Fig.4).

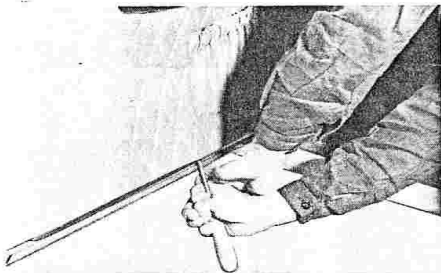


Fig.5

4. In order to avoid damage to the rubber seal, the lower edge of the panel should be raised slightly with a screwdriver when fitting (Fig.5).
5. Fit handle for quarter-light window.
6. Fit window winding handle and secure with retaining pin.
7. Fit door "pull".
8. Fit decorative strip and secure with holding screws.

N. B. !

The interior panels below the rear side windows are secured by spring clips in the same way. Their fitting and removal follows the same sequence!